MAXX Isi2

ALL-ROUND HIGH PERFORMANCE FLOOR FINISHER



Performance

- The smooth protective film minimises dirt adhesion and enhances floor appearance
- Excellent resistance to scuffs, marks and traffic dirt
- With superior application and film formation properties


Efficiency

- Applying the product shortly after stripping saves time and minimises coating costs
- Long lasting high gloss protection with low maintenance costs
- Easy to apply and restore

Safety

- Metal salts and TBEP plasticiser-free formula results in a low impact to the environment and indoor air quality
- Colour-coded system to ensure the use of the right product for the right cleaning task


*Certified according to DIN 18032**

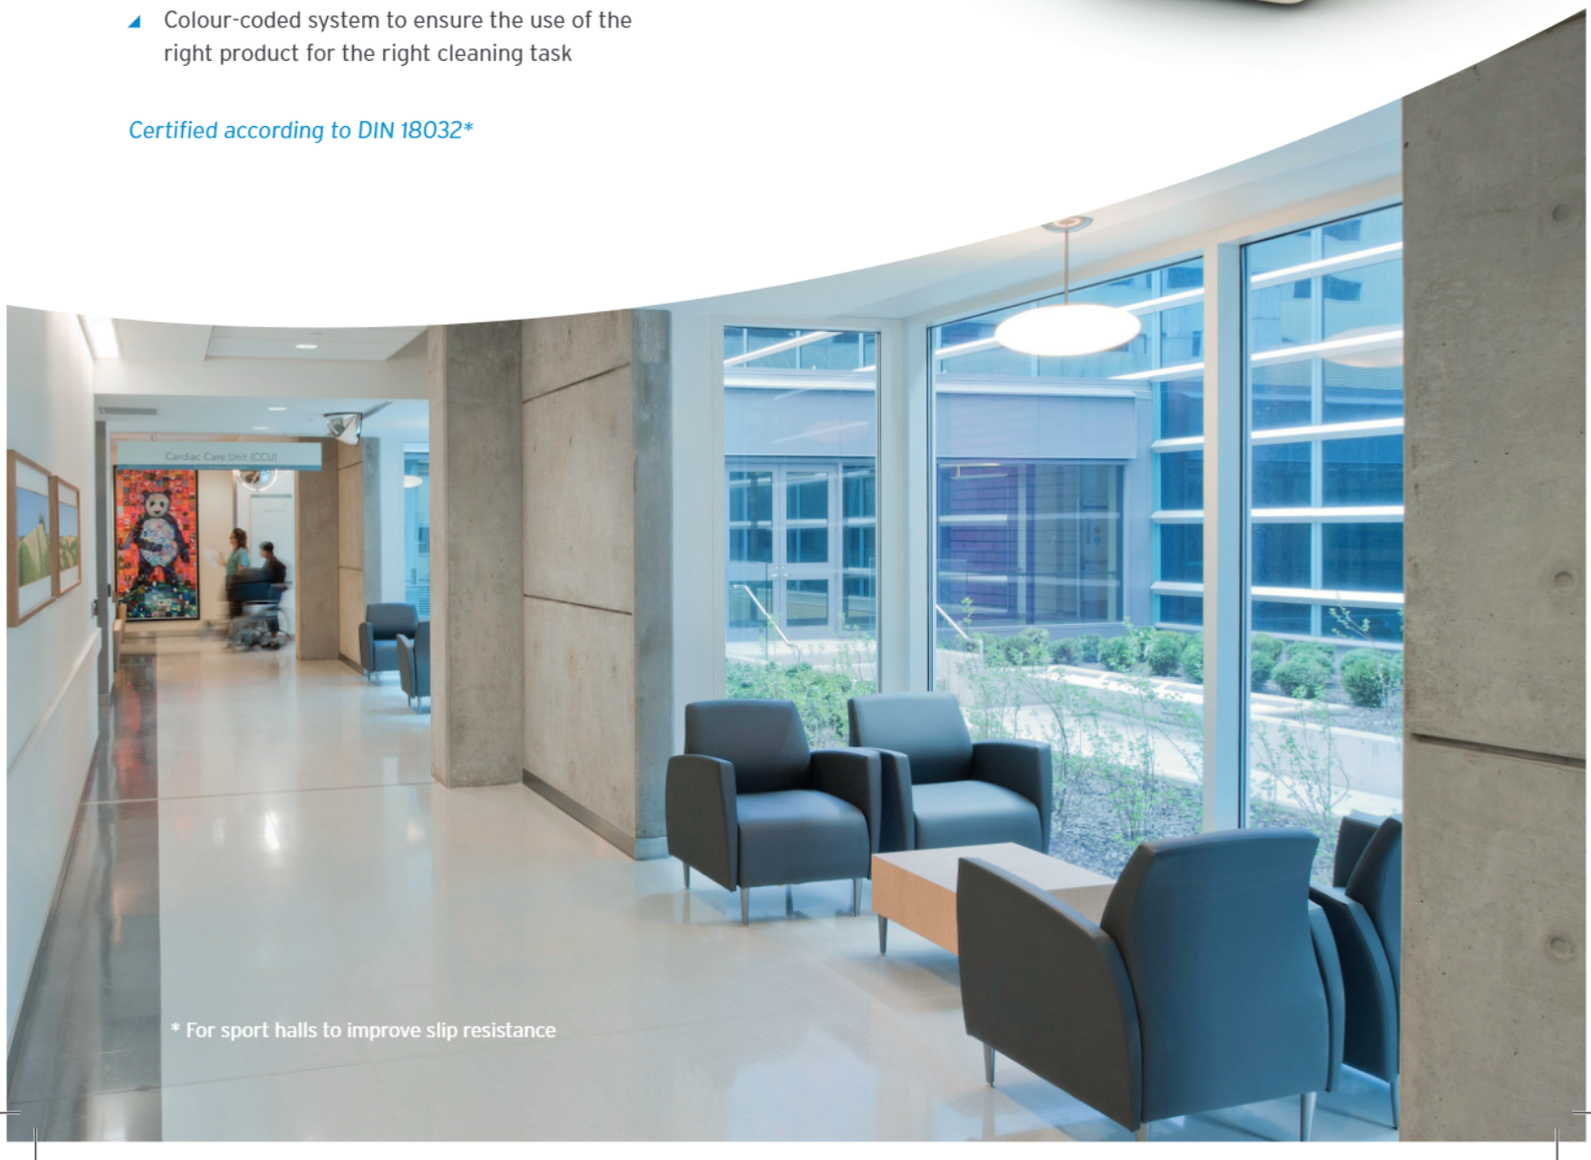

* For sport halls to improve slip resistance

Properties Of Our New Floor Finishes

- New generation of polymers.
- Increased adhesion properties due to special components.
- Remaining moisture does not break off the coating.

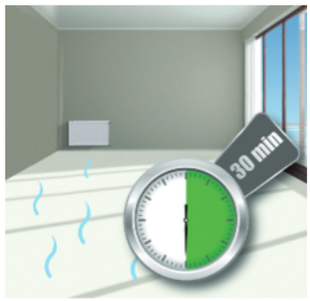


Coating of 'damp' linoleum floors

Recommended Customer Areas

- All water resistant floorings apart from wooden floors, laminates, carpets and floorings not recommended for coating. Being ideal for linoleum floors in schools, nursery schools and other public high traffic areas.

Use Instruction:

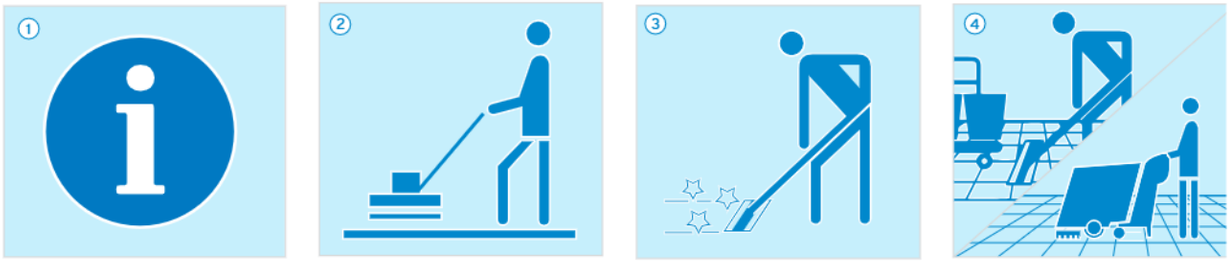

1. Check hygiene plan for detailed use information.
2. Strip the floor thoroughly to remove dirt and all old layers. Excellent stripping results can be achieved with Maxx Forte2.
3. For linoleum, porous or worn floors, let the flooring dry for 30 minutes after stripping. Apply 2 - 3 coats of MAXX Isi2 undiluted on the floor using the Rasant System. Allow each coat to dry before applying a new coat.
4. For maintenance cleaning of the coated floor we recommend MAXX Indur2 for manual and MAXX Magic2 for machine cleaning.

SPECIAL NOTES / INFORMATION:

Position warning signs 'Attention wet floor' and leave in place until surface is totally dry.

For professional use only!

Safety Data Sheet for professional users available on request.

STORAGE CONDITIONS:

Recommended storage temperature between 0 °C and 40 °C

pH value (100%)

7	**8**	9	10	11	12	13	14

PRODUCT	ARTICLE No.	PACK SIZE
MAXX Isi2	9084620	2 x 5L Bottle

Worldwide Headquarters
Ecolab Inc.
370 Wabasha Street N
St. Paul, MN 55102

European Headquarters
Ecolab Europe GmbH
Richtistr. 7
CH-8304 Wallisellen

www.ecolab.com

© 2015 Ecolab USA Inc. All rights reserved.